


Hanging LED tube with its integrated driver ideal for applications in poultry houses. It will allow you to make considerable savings both in energy consumption and maintenance costs. It replaces any luminaire with bulb or any fluorescent tube.

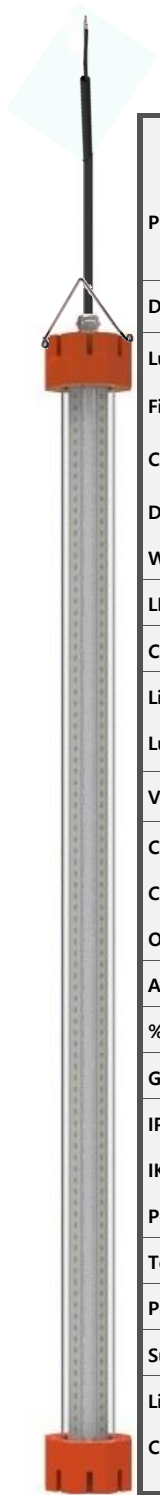

	30W
Product code	TL6AHT-30W-REG-DSV
Designation	Waterproof LED Tube 1,800 mm 30 Watt double V-shape
Luminaire structure	Robust molded plastic with polycarbonate lens and polymer cable gland
Fixation and connectors	Eyelet and INOX fixing and a 100cm 2-wire (Phase and Neutral) wire - Class II
Current flow	Built-in bypass
Dimensions	Length of 1,800 mm
Washable	Yes at 1500 psi / 100 bar at 1 meter
LED diode brand	Samsung
Consumption	30W
Light power	4 800 lm / 4 200 lm
Luminous efficiency	160 lm/W diode output / 140 lm/W optical output
Variation	Dimmable from 0.2% to 100% on 230V or via 0-10V signal
Color T°	3000K
Color rendering index	≥83
Optical	Clear
Angle of diffusion	360°
% flicker of non-visible light	4%
Glare rate-Standard 12464-1	≤ 23 (Cloakroom, technical room, shop)
IP water protection index	IP 66
IK impact protection class	IK 08
Power factor	0.95
Total harmonic distortion (THD)	<15%
Permissible ambient T°	-20°c / +40°c
Supply voltage / Frequency	175-285 Vac / 50Hz
Lifetime / Warranty	>80 000h / 5 years
Certifications	