


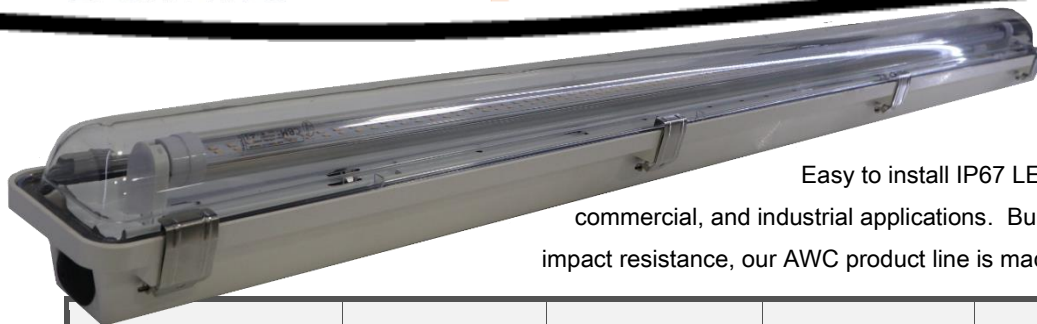

Easy to install IP67 LED fixture, ideal for agricultural, commercial, and industrial applications. Build with sturdy material for high impact resistance, our AWC product line is made to resist heavy washdowns.

	20 W	40 W	60 W	80 W	120 W
Product code	AWC120LED100/277V	AWC220LED100/277V	AWC320LED100/277V	AWC420LED100/277V	AWC620LED100/277V
Designation	IP67 waterproof fixture + non-dimmable LED 20W High lumen tubes				
Structure	Housing: 5VA Fiberglass with Pour-in-Place gasket Gear Tray: steel white paint Diffuser: Injection Molded with 100% Impact Resistant Acrylic, in clear or FR50 frost, smooth or ribbed Latches & Brackets: 316 stainless steel				
Dimensions	4' 51 7/8 x 4 x 4	4' 51 7/8 x 7 x 4 ½		8' 100 x 7 x 4 ½	
Washable	with up to 1500 PSI steam pressure at a temperature up to 200 ° F				
LED tube brand	CBM				
Consumption	20 WATT	40 WATT	60 WATT	80 WATT	120 WATT
Light power	2 880 lm	5 760 lm	8 640 lm	11 520 lm	17 280 lm
Luminous efficiency	160 lm/w				
Dimmable	Non-dimmable				
Color T°	5000K, 6000K (3000K and 4000K on demand)				
Color rendering index	≥80				
Optical	Clear, Frosted, Rib				
Beam angle	120°				
% flicker of non-visible light	4%				
IP water protection index	IP67				
IK impact protection class	IK05				
Power factor	0.99				
Total harmonic distortion	<15%				
Maximum ambient T°	-40°c / +45°c				
Supply voltage / Frequency	100/277V 50/60Hz				
Lifetime / Warranty	≥ 80 000 h / 5 years				
Certifications	CE NSF SP® US NEMA 4X				