

## INSTRUCTION MANUAL

- Thank you for purchasing our product. To ensure safe usage of this product, please read the following instructions carefully.
- Please take note of the safety guidelines provided in the box below regarding the use of this product

### **! WARNING**

- This Highbay is within the input voltage: 100-240 VAC, 50/60 Hz.
- If the input voltage exceeds this range, light failure may result. Make sure you are operating at the correct input voltage.
- Ensure that the ambient operating temperature is between -4 °F (-20 °C) et 113 °F (45 °C).
- Using this Highbay at temperatures outside this range will reduce its service life.
- Make sure to switch off the power supply before starting the installation process.


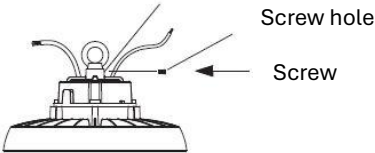

### **! ATTENTION**

- IP protection rating: can operate in damp environments.
- Please keep the Highbay away from corrosive substances. When cleaning, please use a damp or dry cloth.


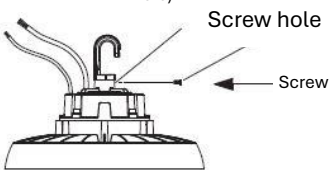

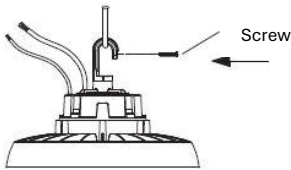
Product Code	SRD150WCCT	SRD240WCCT
Power	100W/125W/150W	150W/200W/240W
Input Current	1.65 A	2.64A
Input Voltage	AC100-240V	
Frequency	50/60Hz	

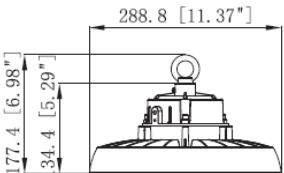
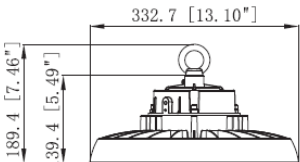
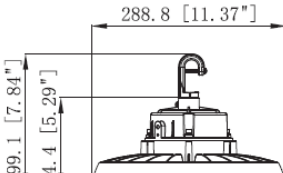
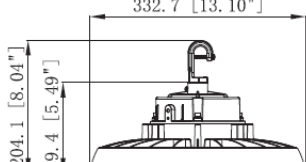
## Installation Instructions

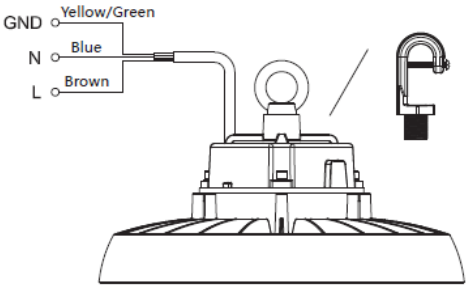
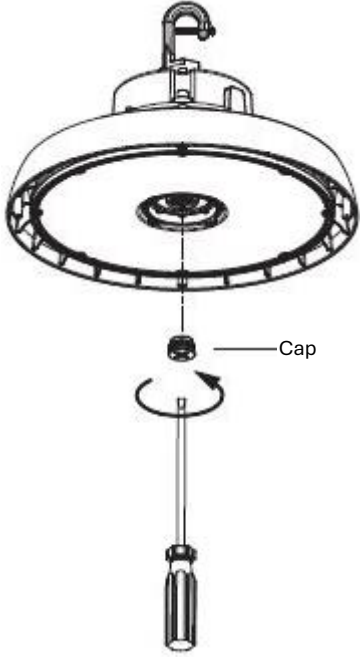
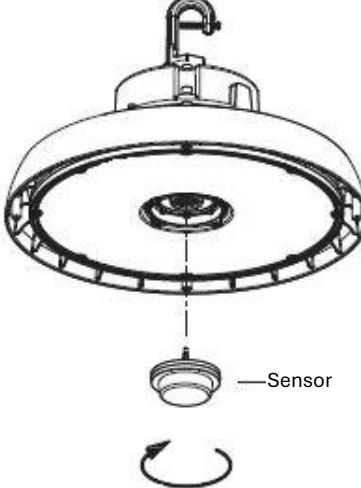
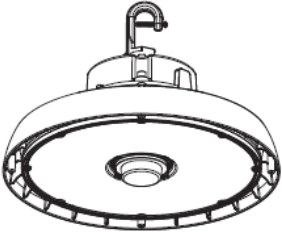

### 1. Ring hook


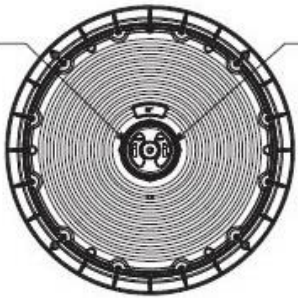
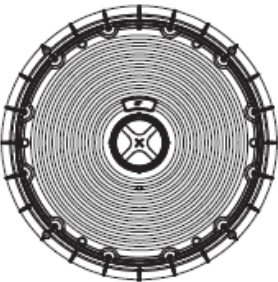
<p>Lock the ring hook</p> 	<p>Tighten the screw</p> <p>(This step can be omitted if there is no screw hole)</p> 	<p>Hang the light</p> 
---	---	---

### 2. Hook

<p>Lock the hook</p> 	<p>Tighten the screw</p> <p>(This step can be omitted if there is no screw hole)</p> 	<p>Hang the light</p> 	<p>Lock the screw</p> 
--	--	--	---

Dimensions with ring		Dimensions with hook	
 <p>150W</p>	 <p>240W</p>	 <p>150W</p>	 <p>240W</p>

Wiring connection	Manual sensor installation	
<p>Switch off power supply, connect AC wire.</p> <p>Brown wire to <b>L</b>, blue wire to <b>N</b> and green/yellow wire to <b>E</b>.</p> 	<b>1.Remove the protective cap.</b>	<b>2. Screw on the sensor.</b>
		
	<b>3. Installation complete.</b> <div style="display: flex; align-items: center; justify-content: space-around;">  <div> <p><b>Wiring diagram</b></p>  </div> </div>	

Wattage and colour selection		
<b>1. Remove the waterproof rubber cover from the power box.</b> 	<b>2. Select the wattage using the slide switch. Repeat for colour.</b> <div style="display: flex; align-items: center; justify-content: center; margin-top: 20px;"> <div style="border: 1px solid black; padding: 2px; margin-right: 10px;">100W/125W/150W</div> <div style="border: 1px solid black; padding: 2px; margin-right: 10px;">150W/200W/240W</div>  <div style="border: 1px solid black; padding: 2px; margin-left: 10px;">35K-40K-</div> </div> <p style="text-align: center; margin-top: 10px;">Wattage label</p>	<b>3. Replace the rubber sealing cover.</b> 

Installation must be carried out by a qualified electrician.